

Data Sheet

DS-TMF-5965-MFC-eng

October, 2008

Brooks® Model 5965

High Performance Metal Seal
High Flow Mass Flow Controller



Model 5965 Metal Seal MFC

Features and Benefits

- Electropolished wetted surfaces (optional)
- Enhanced process (5 Ra avg.) internal surface finish
- Normally closed valve (normally open valve optional)
- Particulate free
- High purity VAR 316L Stainless Steel
- High flow capability (100 slpm N₂, 200 slpm H₂)
- Fast response to command changes
- Helium leak check ports
- Class 100 assembly and calibration
- High leak integrity (less than 10⁻¹⁰ atm-cc/sec He)
- Negligible flow overshoot/undershoot
- Insensitive to mounting attitude
- TTL compatible "valve off" function
- Electrically activated valve override
- Low command flow cutoff
- Available with all popular process connections

Brooks® Model 5965

Description

The Brooks® Model 5965 Mass Flow Controller offers state of the art performance in high flow gas measurement and control. It combines the outstanding leak integrity of metal seals, ultraclean internal surface finish (5 Ra avg.) for particulate-free delivery and enhanced response for rapid process applications. A leader in its class, the Brooks Model 5965 MFC redefines Ultra Clean Performance by providing extremely low molecular contamination levels. The superior design also allows for very rapid gas changeover. All of this makes the Model 5965 the best solution for even the most challenging application.

Principle of Operation

The operating principle of the Brooks Mass Flow Meter is thermodynamic. A precision power supply directs heat to the midpoint of the sensor tube carrying the flow. On the same tube equidistant upstream and downstream of the heat input, are resistance temperature measuring elements.

With no flow, the heat reaching each temperature element is equal. With increasing flow, the flowstream carries heat away from the upstream element, T1 and an increasing amount towards the downstream element T2. An increasing temperature difference develops between the two elements and this difference is proportional to the amount of gas flowing or the mass flow rate. A bridge circuit interprets the temperature difference and an amplifier provides the output to the control circuitry as well as a 0-5 Vdc output signal.

The control circuitry compares the command set-point to the flow signal and positions the precision solenoid control valve. When the command signal is below 1% of full scale, the control valve is positioned to fully closed. The control valve can be latched fully open or closed by activating the valve override circuit.

Specifications

Performance Characteristics

Flow Ranges:

Any full scale flow from 10 slpm* to 100 slpm nitrogen equivalent, up to 200 slpm H₂. Higher H₂ flows possible, consult factory.

*Standard pressure and temperature in accordance with SEMI (Semiconductor Equipment and Materials International) standard 0°C and 101 kPa (760 Torr).

Accuracy:

±1 full scale including linearity at calibrated conditions

Particulate:

Zero particles per cubic foot greater than 0.1 micron under process conditions. Less than 1 particle per cubic foot greater than 0.02 microns under process conditions.

Repeatability:

0.25% of rate

Settling Time: Less than 3 seconds to within 2% full scale of final value for a 0-100% command step.

**Per SEMI Guideline E17-91.

Control Range:

50 to 1 (with elastomeric valve seat)

Sensitivity to Mounting Attitude:

±0.5% full scale maximum deviation from specified accuracy after re-zeroing.

Pressure Sensitivity:

±0.03% per psi up to 150 psig (N₂)

(PED) Pressure Equipment Directive (97/23/EC)

as Sound Engineering Practice (SEP)

Leak Integrity, Inboard to outboard:

1 x 10⁻¹⁰ atm cc/sec Helium Max.

Maximum Operating Pressure:

1500 psig; 10-50 psid pressure drop (minimum pressure drop depends on gas and range--consult factory)

Command Input:

0 to 5 Vdc (200 k ohms input resistance)

Output Signals:

0 to 5 Vdc (Maximum load 2 k ohms)

5 Volt Reference Output:

5 Volts ±0.2% (±0.01 Vdc) maximum load 2 k ohms

Temperature Sensitivity:

Zero: Less than ±0.075% full scale per °C

Span: Less than ±1.0% full scale shift over 10-50°C range

Power Supply Sensitivity:

±0.09% full scale over total power supply voltage

±15 Vdc (±5%) at 350 mAdc

10.5 watts power consumption

Physical Characteristics

Materials of Construction:

316L, 316L VAR (vacuum arc remelt) and high alloy ferritic stainless steel. External/internal seals: Nickel 200 Valve Seat: 316L, Viton® fluoroelastomers, Buna-N, Kalrez® or Teflon®.

Process Connections:

- Integrally welded to body-
- Standard: 1/4" VCR™ with 0.250" bore
- Optional: 1/2" ATW Tube Stub
- 3/8" - 1/2" VCR
- 1/2" ACLIT™

Dimensions:

See Figure 1

Electrical Characteristics

Electrical Connections:

- Card edge: 30 microinch gold flashing over low stress nickel-plated copper
- D-Connector: DA 15 P

EMC DIRECTIVE (89/336/EEC) per EN 61326.

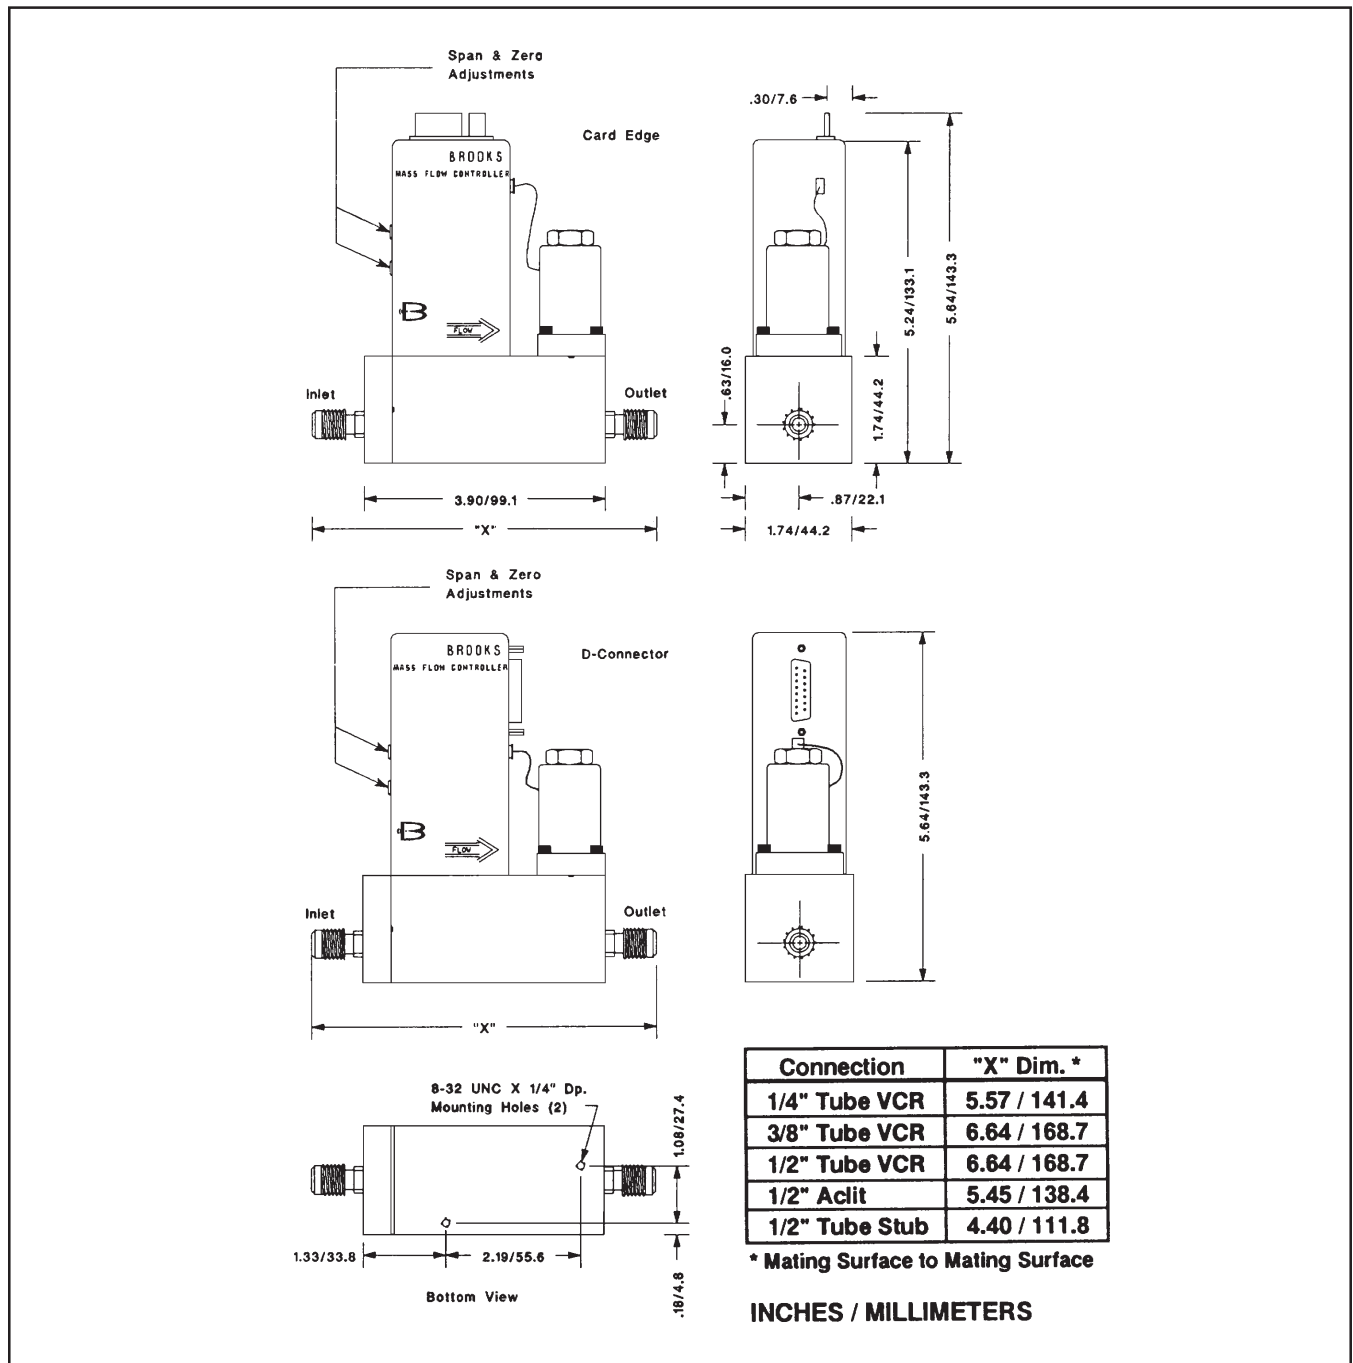


Figure 1 Dimensions

Brooks® Model 5965

BROOKS SERVICE AND SUPPORT

Brooks is committed to assuring all of our customers receive the ideal flow solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration. The primary standard calibration equipment to calibrate our flow products is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit www.BrooksInstrument.com to locate the service location nearest to you.

START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

CUSTOMER SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users and maintenance persons. Please contact your nearest sales representative for more details.

HELP DESK

In case you need technical assistance:

Americas ☎ 1-888-554-FLOW
Europe ☎ +(31) 318 549 290 Within Netherlands ☎ 0318 549 290
Asia ☎ +011-81-3-5633-7100

Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

TRADEMARKS

ACLIT Transfluid
Brooks Brooks Instrument, LLC
Emerson Brooks Instrument, LLC
Kalrez DuPont Dow Elastomers
Teflon E. I. DuPont de Nemours & Company
VCR Cajon Co.
Viton DuPont Performance Elastomers



Brooks Instrument
407 West Vine Street
P.O. Box 903
Hatfield, PA 19440-0903 USA
T (215) 362-3700
F (215) 362-3745
E-Mail BrooksAm@BrooksInstrument.com
www.BrooksInstrument.com

Brooks Instrument
Neonstraat 3
6718 WX Ede, Netherlands
T 31-318-549-300
F 31-318-549-309
E-Mail BrooksEu@BrooksInstrument.com

Brooks Instrument
1-4-4 Kitasuna Koto-Ku
Tokyo, 136-0073 Japan
T 011-81-3-5633-7100
F 011-81-3-5633-7101
E-Mail BrooksAs@BrooksInstrument.com

